


# PARTIAL SUBDIVISION OF SECTION 26, A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE

SITUATED IN T.18 S., R.13 E. NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

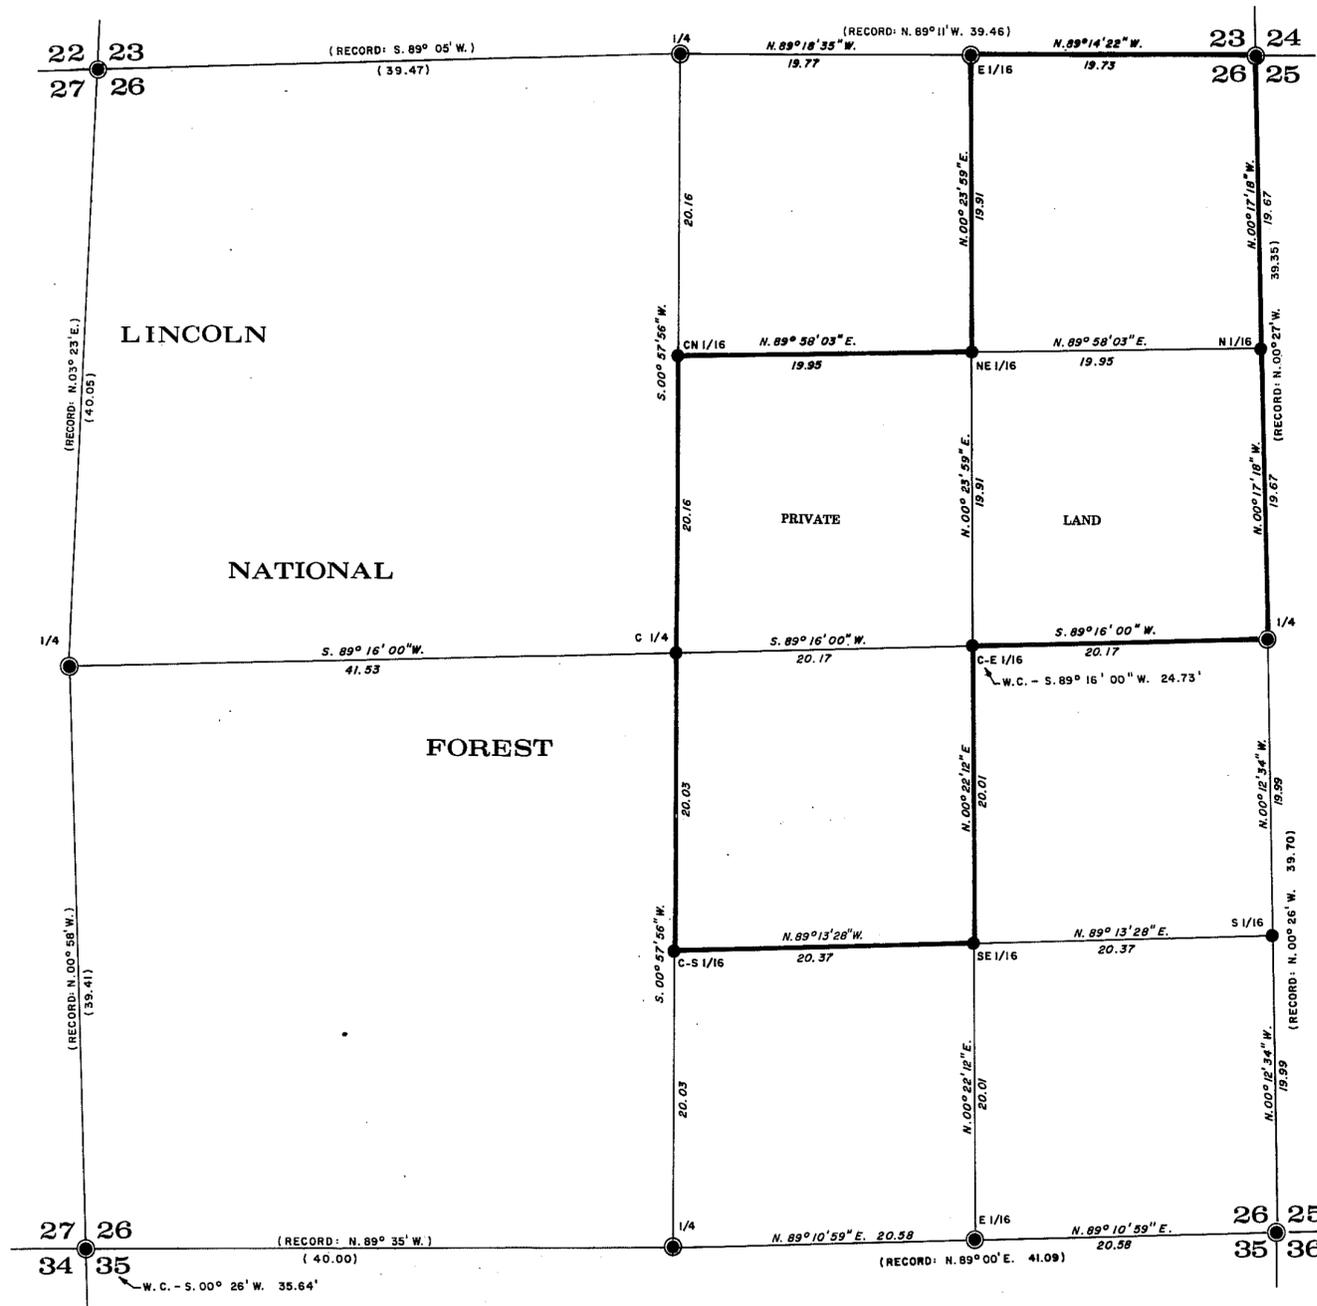


This plat represents a record of the partial subdivision of Section 26, T. 18 S., R. 13 E., N.M.P.M., New Mexico which constitutes a portion of the property lines of the Lincoln National Forest.

I certify this survey was performed by Victor R. Crawford, Forest Service Surveying Technician, under my direction and that same is true and correct to the best of my knowledge.

Survey completed April 25, 1975.

Charles C. Doak, Regional Land Surveyor, Southwestern Region, Albuquerque, New Mexico.



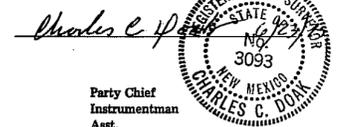


Assistants: V.R. Crawford  
R.W. Saenz  
J. Romero  
J. Fields

Party Chief  
Instrumentman  
Asst.  
Asst.

### LEGEND

- CORNER REMONUMENTED/MONUMENTED.....●
- FOUND G.L.O. OR B.L.M. BRASS CAP.....●
- BOUNDARY OF NATIONAL FOREST LAND.....—
- PORTION OF SURVEY NOT A FOREST SERVICE PROPERTY LINE.....—

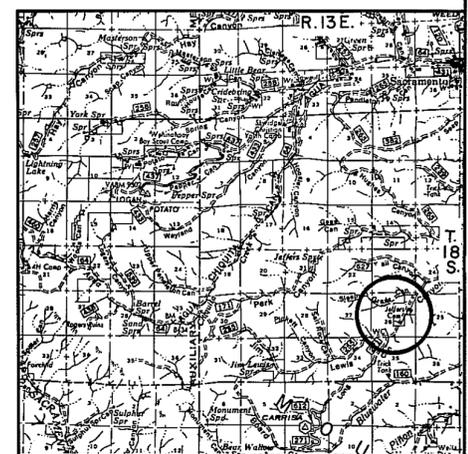

NOTE: DISTANCE MEASURED WITH ELECTRONIC MEASURING INSTRUMENT.  
AZIMUTH DETERMINED BY SOLAR OBSERVATION.

THIS PLAT PREPARED BY BOHANNAN WESTMAN HUSTON & ASSOC., INC FROM DATA FURNISHED BY THE U.S.D.A. FOREST SERVICE.

SHEET 1 OF 2

U.S. Department of Agriculture  
FOREST SERVICE  
SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

Checked by *vee* Approved by *eed* Date *6/23/75*

PARTIAL SUBDIVISION OF SECTION 26,

A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE

NOTE: Forest Service Sign Designations:

54-2 PROPERTY BOUNDARY  
54-3 BEARING TREE  
54-4 ATTENTION

Chains

00.00 Beginning at the corner common to sections 23, 24, 25 and 26, as evidenced by a standard GLO iron post projecting 8 ins. above the ground with a mound of stone and brass cap mkd.

23 | 24  
26 | 25

1941

No bearing trees were found. (Old burned area).  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Observe the sun and determine bearing N.89°14'22"W., (record: N.89°11'W.)

Thence between sections 23 and 26.

Ascend gradually along SE slope.

19.73 (Record: 19.73) at which point

Intersect the E 1/16 corner of sections 23 and 26, as evidenced by a standard GLO iron post projecting 6 ins. above the ground and no mound of stone, with brass cap mkd.

E 1/16 23  
26

1941

from which an old bearing tree

A pine, 6 ins. diam., bears S.34°E., 11 lks. dist., mkd. E 1/16 S26 BT.

Attach standard U.S. Forest Service sign 54-3 to bearing tree.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Thence

00.00 New Measurement

N.89°18'35"W., (record: N.89°11'W.), broken bearing, continue between sections 23 and 26.

Ascend SE slope.

19.77 (Record: 39.46) at which point

Intersect the 1/4 corner for sections 23 and 26, as evidenced by a GLO iron post projecting 10 ins. above the ground, in a mound of stone, with brass cap mkd.

1/4 23  
26

1941

No bearing trees were found.  
Corner is located east 200 ft. from a small canyon that drains to Sleepy Grass.  
Drive a 5 ft. steel post alongside the corner and attach a standard U.S. Forest Service sign 54-4.

Thence

00.00 New Measurement

Observe the sun and determine bearing.

S.00°57'56"W. along the meridional centerline of section 26.

Ascend north slope through heavy timber and underbrush.

20.16 Proportionate distance

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground, raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
CN 1/16 + S26  
L.S. 3093  
1975

from which bearing tree

A pine, 6 ins. diam., bears N.05°E., 15.5 lks. dist., mkd. X BT.

Attach standard U.S. Forest Service sign 54-3 to bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue S.00°57'56"W.

STATE OF NEW MEXICO  
OTERO COUNTY  
FILED FOR RECORD IN MY OFFICE  
8 Aug 1975  
1125 P  
19 33-34

Frankie Dean

40.32 Point of intersection

At which point

Set an iron post, 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
C 1/4 + S26  
L.S. 3093  
1975

No bearing trees available.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue S.00°57'56"W.

60.35 Proportionate distance

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
C-S 1/16 + S26  
L.S. 3093  
1975

No bearing trees available.

Continue S.00°57'56"W.

80.38 At which point

Intersect the 1/4 corner of sections 26 and 35 as evidenced by a standard GLO iron post projecting 6 ins. above the ground and a small mound of stone, with brass cap mkd.

1/4 26  
35

1941

from which old bearing trees

A sugar pine, 6 ins. diam., bears S.17 1/2°W., 17 lks. dist., with blaze overgrown.  
A sugar pine, 6 ins. diam., bears N.32°W., 11 lks. dist., with blaze overgrown.

Attach standard U.S. Forest Service sign 54-3 to all bearing trees.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.

00.00 New Measurement

From the 1/4 corner of sections 26 and 35 as previously described.

N.89°10'59"E., (record: N.89°00'E.), between sections 26 and 35; east 1/2 mile.

3.60 Small canyon drains to Jim Lewis Canyon.

Ascend SW slope.

20.58 Proportionate distance

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S E13E  
E 1/16 25  
35  
L.S. 3093  
1975

No bearing trees available.

Continue N.89°10'59"E.

37.30 Top of ridge bears north and south.

41.16 At which point

Intersect the section corner for sections 25, 26, 35 and 36, as evidenced by a standard GLO iron post projecting 18 ins. above the ground with a mound of stone, with brass cap mkd.

26 | 25  
35 | 36

1941

from which

An old dead and very decomposed bearing tree was found.

No other trees available to scribe.

Corner falls on a southeast slope, 3 chains west of a north-south fence line.

Attach standard U.S. Forest Service sign 54-3 to the remains of the bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.

00.00 New Measurement

From the section corner of sections 25, 26, 35 and 36 as previously described.

N.00°12'34"W., (record: N.00°26'W.), between sections 25 and 26.

7.30 Top of ridge bears SE and NW.

Descend NW slope where head of small canyon drains to Jim Lewis Canyon.

19.99 Proportionate point

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
S 1/16 26 | 25  
L.S. 3093  
1975

No bearing trees available.  
Corner falls on a west slope, 7 chains east from a small canyon.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.

Gradually ascending along west slope.

39.98 (Record: 39.70)

At which point

Intersect the 1/4 corner for sections 25 and 26 as evidenced by a standard GLO iron post projecting 6 ins. above the ground, raise a mound of stone to the base of the cap, with brass cap mkd.

1/4 26 | 25

1941

No bearing trees found.

00.00 New Measurement

N.00°17'18"W., (record: N.00°27'W.), between sections 25 and 26.

2.00 Top of ridge.

Descending steep north slope.

19.66 Proportionate distance.

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground, raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
N 1/16 26 | 25  
L.S. 3093  
1975

from which

A pine, 12 ins. diam., bears N.26 1/2°E., 92.9 lks. dist., mkd. X BT.  
A pine, 14 ins. diam., bears S.16 3/4°E., 74.1 lks. dist., mkd. X BT.

Attach standard U.S. Forest Service sign 54-3 to all bearing trees.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue N.00°17'18"W.

25.00 Jim Lewis Canyon drains NE.

39.33 At which point

Intersect the section corner of sections 23, 24, 25 and 26 as previously described.

00.00 New Measurement

From the 1/4 corner of sections 25 and 26 as previously described.

S.89°16'00"W., along the latitudinal centerline of section 26.

Descending west slope.

20.17 Proportionate distance.

At which point

Corner falls in the traveled roadway of Jim Lewis Canyon.

At the corner point drive a 3/4 in. iron pin flush with the ground, set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground for a witness corner, a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E WC  
C-E 1/16 + S26  
L.S. 3093 24.73'  
1975

from which

A pine, 30 ins. diam., bears S.85°E., 32 lks. dist., mkd C-E 1/16 S26 BT.

Bearing tree is for the corner point only.  
Witness corner bears S.89°16'00"W., 24.73 ft.  
Drive a 5 ft. steel post alongside the witness corner and attach the standard U.S. Forest Service signs 54-2 and 54-4.

Continue S.89°16'00"W.

Ascend an east slope.

40.34 At which point

Intersect the C 1/4 S26 as previously described.

Continue S.89°16'00"W.

81.86 At which point

Intersect the 1/4 corner of sections 26 and 27 as evidenced by a standard GLO iron post projecting 6 ins. above the ground, and a small mound of stone, with brass cap mkd.

1/4 27 | 26

1941

No bearing trees found.  
Drive a steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.

00.00 New Measurement

From the N 1/16 corner of sections 25 and 26, as previously described.

S.89°58'03"W., along the latitudinal centerline of the NE 1/4 S26.

19.95 Point of intersection

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
NE 1/16 + S26  
L.S. 3093  
1975

from which

A juniper, 4 ins. diam., bears N.49°W., 27 lks. dist., mkd. X BT.  
A juniper, 4 ins. diam., bears S.51°W., 1.30 chains dist., mkd. X BT.

Attach standard U.S. Forest Service sign 54-3.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue S.89°58'03"W.

39.89 At which point

Intersect the CN 1/16 S26 as previously described.

00.00 New Measurement

From the C-E 1/16 S26 as previously described.

N.00°23'59"E., along the meridional centerline of the NE 1/4 S26.

19.91 At which point

Intersect the NE 1/16 corner of section 26 as previously described.

39.82 At which point

Intersect the E 1/16 corner of sections 23 and 26 as previously described.

00.00 New Measurement

From the C-E 1/16 of section 26 as previously described.

S.00°22'12"W. along the meridional centerline of SE 1/4 S26.

20.00 Point of intersection

At which point

Set an iron post 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground, raise a mound of stone to the base of the cap, with brass cap mkd.

USDA FS  
T18S R13E  
SE 1/16 + S26  
L.S. 3093  
1975

No bearing trees available.  
Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue S.00°22'12"W.

40.01 At which point

Intersect the E 1/16 corner between sections 26 and 35, as previously described.

00.00 New Measurement

From the C-S 1/16 corner of section 26, as previously described.

N.89°13'28"E., along the latitudinal centerline SE 1/4 S26.

20.37 At which point

Intersect the SE 1/16 corner of section 26 as previously described.

Continue N.89°13'28"E.

40.75 At which point

Intersect the S 1/16 corner of sections 25 and 26 as previously described.



U.S. Department of Agriculture  
FOREST SERVICE  
SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

Checked by VEC Approved by LLD Date 4/23/75