


A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

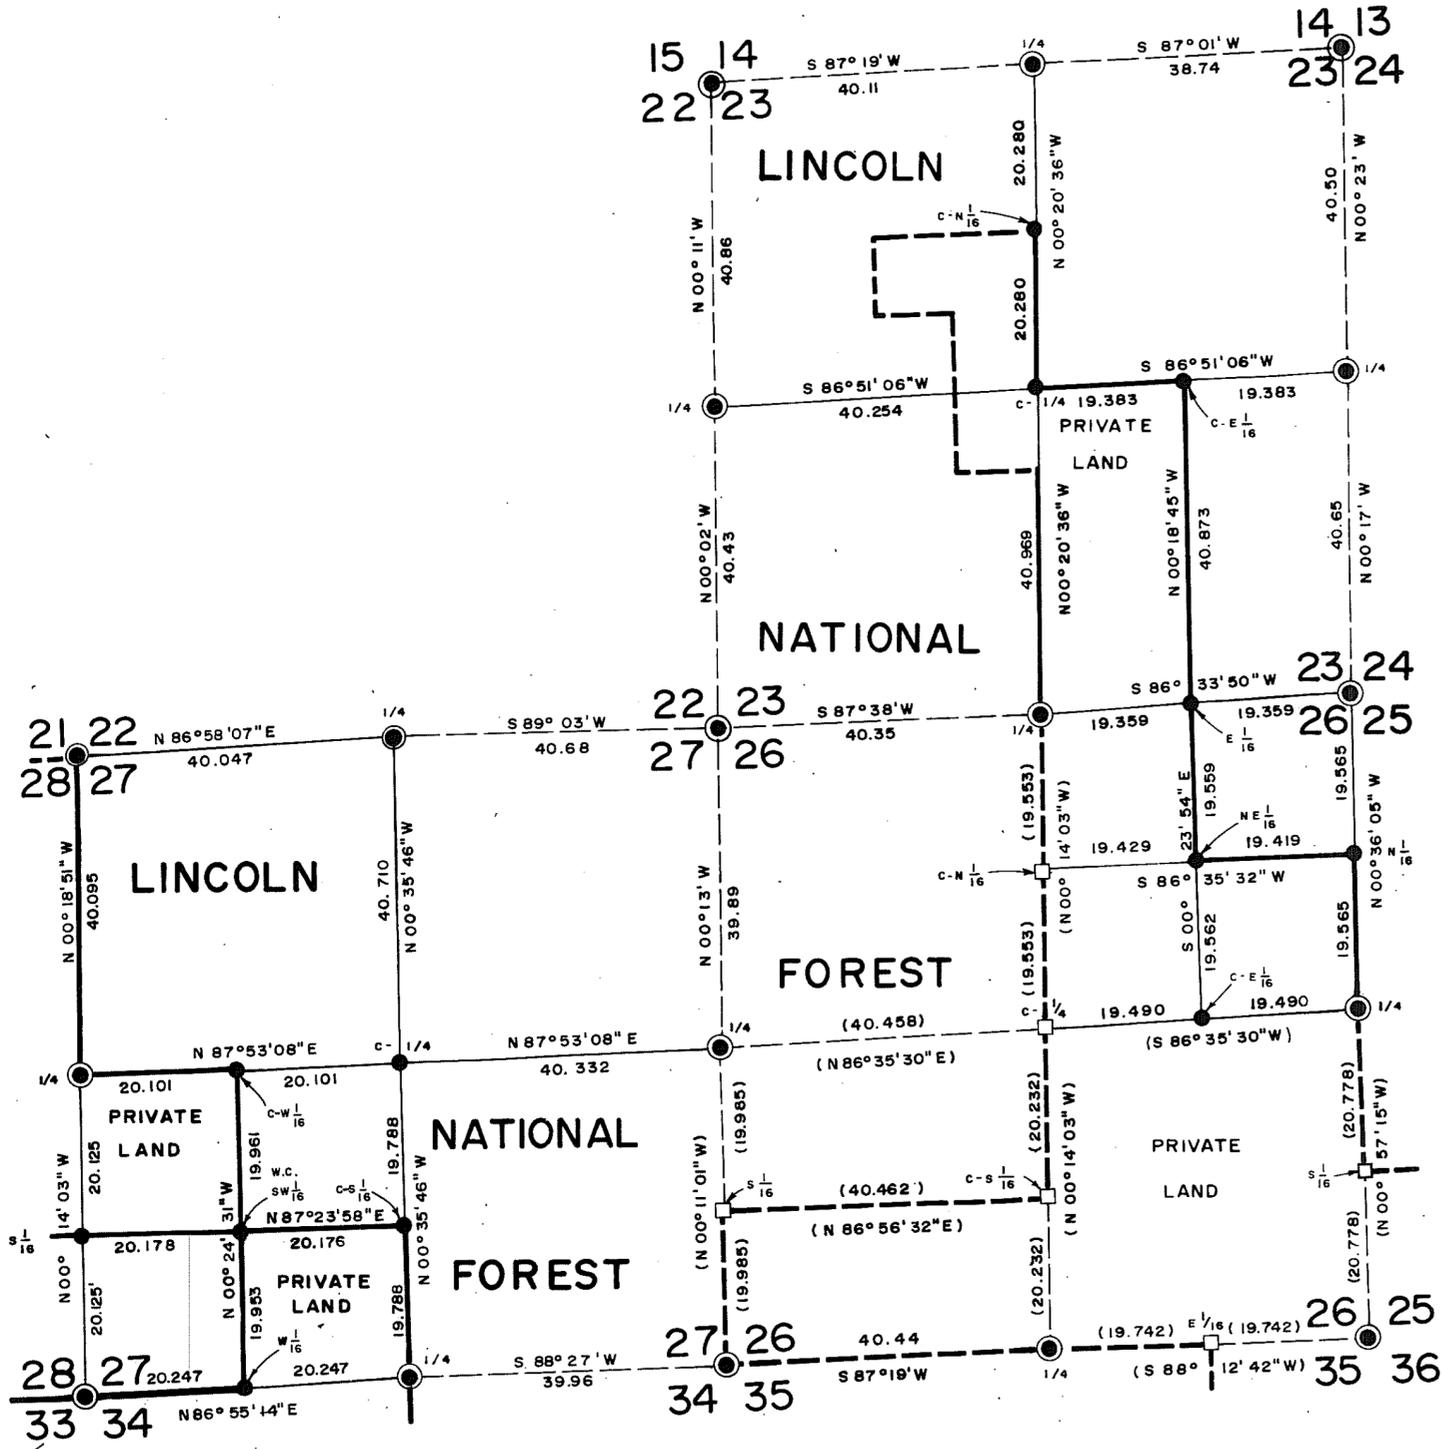

THIS PLAT REPRESENTS A RECORD OF THE RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTIONS 23, 26, 27 AND 33, TOWNSHIP 17 SOUTH, RANGE 13 EAST, NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO, WHICH CONSTITUTES A PORTION OF THE PROPERTY LINES OF THE LINCOLN NATIONAL FOREST.

THE ORIGINAL RESUBDIVISION AND MONUMENTATION OF T17S, R13E, WAS EXECUTED BY WENDALL G. HALL IN 1938. A DILIGENT SEARCH HAS BEEN MADE FOR ALL CORNERS ESTABLISHED AS A RESULT OF THE TWO SURVEYS.

ALL SURVEY WORK HAS BEEN IN STRICT ACCORDANCE WITH THE "MANUAL OF INSTRUCTIONS FOR THE SURVEY OF THE PUBLIC LANDS OF THE UNITED STATES, 1973" PREPARED BY THE BUREAU OF LAND MANAGEMENT. AZIMUTH HAS BEEN DETERMINED BY SOLAR OBSERVATION. THE DISTANCE AND BEARINGS SHOWN ON THIS PLAT WHICH WERE A RESULT OF THIS SURVEY ARE ACTUAL FIELD DATA. THE DISTANCES AND BEARINGS HAVE NOT BEEN BALANCED. A MINIMUM OF 1 IN 5000 FIELD DATA ACCURACY WAS OBTAINED IN ALL TRAVERSES RUN FOR THIS SURVEY.

THIS RESURVEY, SUBDIVISION, MONUMENTATION AND RECORD THEREOF IS FOR THE PURPOSE OF IDENTIFYING AND PERPETUATING THE EVIDENCE OF THE ORIGINAL SURVEY AND FOR LOCATING THE BOUNDARIES BETWEEN LINCOLN NATIONAL FOREST AND PRIVATE OWNED LAND.

THIS RESURVEY, SUBDIVISION, MONUMENTATION AND RECORD THEREOF WAS PREPARED AS A RESULT OF THE REQUEST OF THE SUPERVISOR, LINCOLN NATIONAL FOREST. THE CONTRACT FOR THE SURVEY WITH SPECIAL INSTRUCTIONS FOR THE SURVEY IS NUMBER 16-2148 DATED MAY 13, 1975. THE CONTRACT WAS AWARDED TO BURKE/COLLINS/ASSOCIATES, CONSULTING ENGINEERS AND LAND SURVEYORS, ALAMOGORDO, NEW MEXICO.

THE PRIVATE SURVEY CORNERS SHOWN IN SECTION 26, AND THE BEARINGS AND DISTANCES SHOWN IN PARENTHESIS WERE A RESULT OF U. S. FOREST SERVICE CONTRACT NO. 16-2070 DATED OCTOBER 23, 1974. SAID SURVEY IS RECORDED IN THE OFFICE OF THE OTERO COUNTY CLERK, ALAMOGORDO, NEW MEXICO, IN BOOK 19, PAGES 1 THROUGH 7.

CERTIFICATE

THIS IS TO CERTIFY THAT I AM A REGISTERED LAND SURVEYOR OF THE STATE OF NEW MEXICO, THAT THIS PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY DIRECTION AND THAT THE SAME IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


DARRYL T. COLLINS, BURKE/COLLINS/ASSOCIATES, CONSULTING ENGINEERS & LAND SURVEYORS, ALAMOGORDO, NEW MEXICO.

Darryl T. Collins



LEGEND

- CORNER REMONUMENTED/MONUMENTED.....●
- FOUND G.L.O. OR B.L.M. BRASS CAP.....●
- FOUND SERVICE CLASS "A" CORNER.....●
- FOUND EVIDENCE BELIEVED ACCEPTABLE.....⊗
- BOUNDARY OF NATIONAL FOREST LAND.....—
- PORTION OF SURVEY NOT A FOREST SERVICE PROPERTY LINE.....—
- ORIGINAL SURVEY LINE NOT INCLUDED IN THIS SURVEY.....- - -
- EXISTING PRIVATE SURVEY CORNER.....□
- REBAR.....○

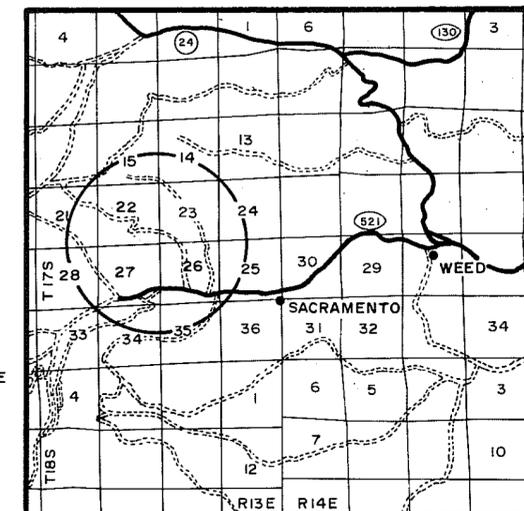


BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

DRAWN BY T.G.	CHECKED BY D.T.C. URC	DATE 8/75
------------------	--------------------------	--------------



A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33

SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

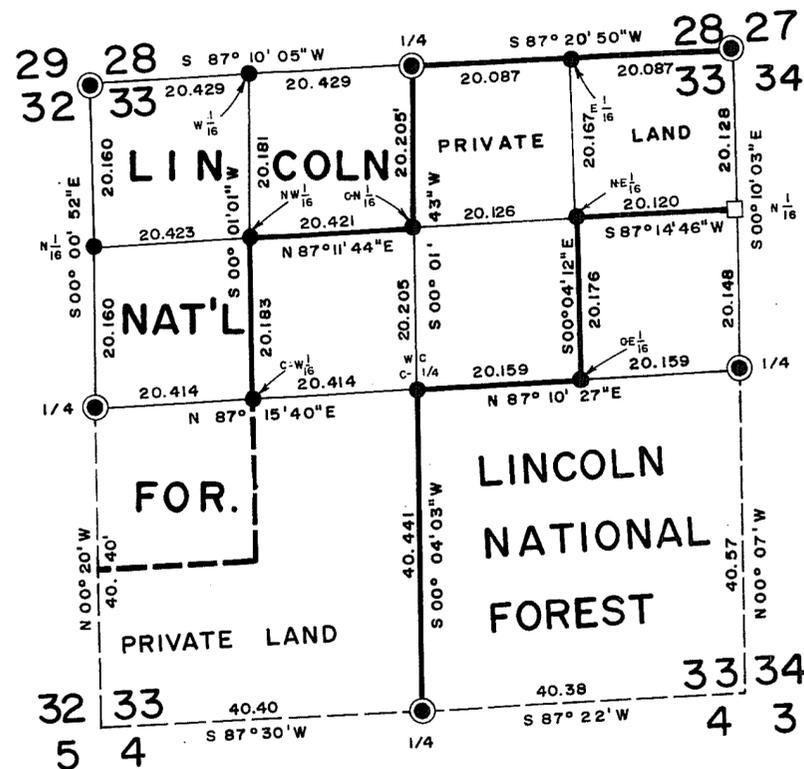

LEGEND

- CORNER REMONUMENTED / MONUMENTED.....●
- FOUND G.L.O. OR B.L.M. BRASS CAP.....●
- FOUND SERVICE CLASS "A" CORNER.....⊗
- FOUND EVIDENCE BELIEVED ACCEPTABLE.....⊗
- BOUNDARY OF NATIONAL FOREST LAND.....—
- PORTION OF SURVEY NOT A FOREST SERVICE PROPERTY LINE.....—
- ORIGINAL SURVEY LINE NOT INCLUDED IN THIS SURVEY.....- - - -
- EXISTING PRIVATE SURVEY CORNER.....□
- REBAR.....○

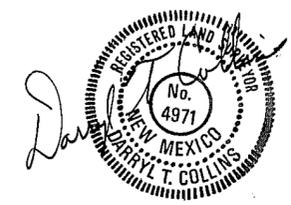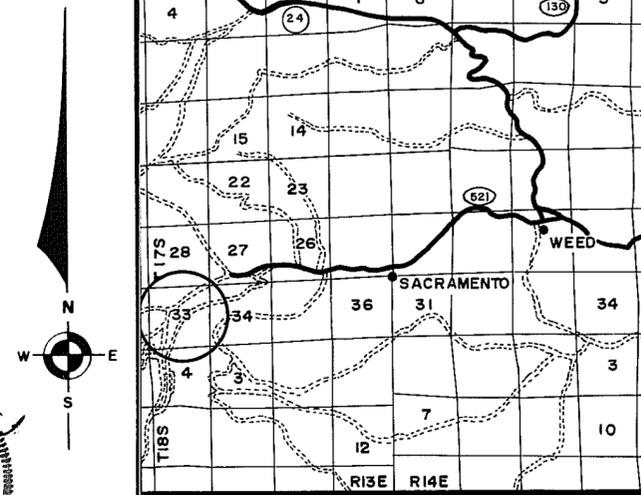

BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

DRAWN BY T.G. CHECKED BY DTC VRC DATE 8 / 75


A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

CHAINS

EXTERIOR BOUNDARY - SECTION 26

IN SECTION 26

00.000 The 1/4 sec. cor. for Section 26 and Section 25, T17S, R13E, NMPM, as evidenced by a firmly set GLO iron post projecting 12 ins. above the ground in a mound of stone with brass cap mkd.




for which
A dead Juniper, 14 ins. in diam., bears S 74° E, a dist. of 21 lks. mkd. 1/4 S25 BT.

No other BT's found.

Thence N 00° 36' 05" W (Record N 00° 34' W) on a bearing established by me on previous work within this section, said work being recorded in the office of the Otero County Clerk, Alamogordo, New Mexico, in Book 19, pages 1 thru 7.

19.565 Point for the N 1/16 section corner of Sections 25 and 26 at proportionate distance.


Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, encircled by a ring of stone to top of aluminum cap mkd.



from which
A dead Ponderosa Pine, 14 ins. in diam., bears N 51° E, 47.3 lks. dist. mkd. X BT.
A dead Ponderosa Pine, 17 ins. in diam., bears S 27° W, 17.9 lks. dist. mkd. X BT.
No live trees within limits

Thence continuing N 00° 36' 05" W.

39.130 (Record 39.13) The section corner for Sections 23, 24, 25 and 26, T17S, R13E, NMPM, as evidenced by a firmly set GLO iron post projecting 24 ins. above the ground in a mound of stone with brass cap mkd.



from which
A dead Juniper, 16 ins. in diam., bears N 8° E, a dist. of 30 lks., blaze illegible.
A dead Juniper, 10 ins. in diam., bears N 82° E, a dist. of 41 lks., blaze illegible.
A dead Juniper, 20 ins. in diam., bears S 26° W, a dist., of 82 lks., blaze illegible.

00.000 The section corner for Sections 23, 24, 25 and 26, T17S, R13E, NMPM, heretofore described.

Thence S 86° 33' 50" W between Section 23 and Section 26 (Record S 86° 32' W).

19.359 Point for the E 1/16 section corner for Section 23 and Section 26 at proportionate distance.

Set an aluminum post 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to solid rock, encircled by a mound of stone, 2 ft. base to top of aluminum cap mkd.



1975

LS 4971

from which
A dead Fir stump, 5 ft. high, 9 ins. in diam., bears S 10° E, 12.5 lks. dist., mkd X BT.
A dead Fir stump, 4 ft. high, 10 ins. in diam., bears S 89° W, 29.8 lks. mkd. X BT.
No live trees within limits

Thence continuing S 86° 33' 50" W.

38.718 (Record 38.56) The 1/4 section corner for Section 23 and Section 26 as evidenced by a firmly set GLO iron post projecting 24 ins. above the ground in mound of stone with brass cap mkd.



1938


from which
A Juniper, 20 ins. in diam., bears N 39° E, 72 lks. dist., blaze illegible.

00.000 The 1/4 section corner for Section 25 and Section 26 heretofore described.

Thence S 86° 35' 30" W, on the latitudinal centerline of Section 26.

19.490 Point for the C-E 1/16 section corner for Section 26 at proportionate dist.

Set an aluminum post, 20 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a mound of stone, 2 ft. base to top of aluminum cap mkd.



from which
A Ponderosa Pine, 6 ins. in diam., bears N 1° E, 42.4 lks. dist. mkd. X BT.
A Ponderosa Pine, 8 ins. in diam., bears S 61° E, 40.1 lks. dist. mkd. X BT.

Thence continuing S 86° 35' 30" W.

38.980 The C.1/4 section corner for Section 26 as set by me on a previous survey, said survey being recorded in the office of the Otero County Clerk, Alamogordo, New Mexico, in Book 19, pages 1 thru 7.

00.000 The N 1/16 section corner for Section 26 and Section 25, T17S, R13E, heretofore described.

Thence S 86° 35' 32" W on the latitudinal centerline of the NE 1/4 of Section 26.

19.419 Point for the NE 1/16 section corner of Section 26 at the intersection of the meridional centerline of the NE 1/4 of Section 26.



BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

SHEET 3 of 9

DRAWN BY: CHECKED BY: DATE:
E.T.C. DTC/ARC 8/75


A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

00.000 The E 1/16 sec. cor. for Section 23 and Section 26 heretofore described.
Thence N 00° 18' 45" W on the meridional centerline of the SE 1/4 of Section 23.

40.873 The C-E 1/16 sec. cor. of Section 23 heretofore described.

CHAINS EXTERIOR BOUNDARY - SECTION 27

00.000 The sec. cor. for Sections 27, 28, 33 and 34, T17S, R13E, NMPM, as evidenced by a firmly set GLO iron post projecting 18 ins. above the ground with brass cap mkd.




1938

No bearing trees found.
Observe sun for azimuth.
Thence N 86° 55' 14" E between Sections 27 and 34.
(Record N 86° 54' E).

20.247 Point for the W 1/16 sec. cor. of Section 27 and Section 34 at proportionate distance. Corner falls in a large open pasture.

Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 30 ins. in the ground with aluminum cap mkd.



No bearing trees within limits.
Thence continuing N 86° 55' 14" E.

40.494 (Record 40.55) The 1/4 sec. cor. for Sections 27 and 34 as evidenced by a firmly set GLO iron post projecting 8 ins. above the ground with brass cap mkd.




No bearing trees found.

00.000 The sec. cor. for Sections 27, 28 33 and 34 heretofore described.

Thence N 00° 14' 03" W between Sections 27 & 28.
(Record N 00° 19' W).

20.125 Point for the S 1/16 sec. cor. for Section 27 and Section 28 at proportionate distance.


Set an aluminum post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, in ring of stone, with aluminum cap mkd.



from which
A Ponderosa Pine, 13 ins. in diam., bears N 30° W, 32.0 lks. dist. mkd. X BT.
A Ponderosa Pine, 15 ins. in diam., bears S 67° W, 18 lks. dist., mkd. X BT.

Thence continuing N 00° 14' 03" W.


40.250 (Record 40.19) The 1/4 sec. cor. for Section 27 and Section 28 as evidenced by firmly set GLO iron post set flush with the ground, with brass cap mkd.



No bearing trees found.

00.000 Thence N 00° 18' 51" W continuing between Sections 27 and 28. (Record N 00° 19' W).

40.095 (Record 40.20) The sec. cor. for Sections 21, 22, 27 & 28 T17S, R13E, NMPM as evidenced by a firmly set GLO iron post projecting 18 ins. above the ground, in a mound of stone, with brass cap mkd.




from which
A Fir, 14 ins. in diam., bears S 62° W, 53 lks. dist., blaze grown over.

A Fir, 13 ins. in diam., bears N 87° W, 23 lks. dist., blaze grown over.
A Fir, 13 ins. in diam., bears N 37° E, 33 lks. dist., blaze grown over.

00.000 The sec. cor. for Sections 21, 22, 27 & 28 heretofore described.

Thence N 86° 58' 07" E between Sections 22 and 27.
(Record N 86° 57' E)

40.047 (Record 39.98) The 1/4 sec. cor. for Section 22 and Section 27 as evidenced by a GLO iron post. Iron post has been ran over and is bent. Unable to straighten post. Drove 3/4 inch galv. iron pipe, 36 ins. long into the ground at location of 1/4 corner if iron post were straightened. GLO iron post has brass cap mkd.



1938

from which
Old Bearing Trees
A Fir, 22 ins. in diam., bears S 39° E, 20 lks. dist., with blaze partially opened and 1/4 marking legible.
A stump, 20 ins. in diam., bears N 23° E, 53 lks. dist., with 'T' visible on remaining portion of blaze.

New Bearing Trees
A Fir, 10 ins. in diam., bears S 88° W, 63.4 lks. dist., mkd. X BT.
A Fir, 13 ins. in diam., bears N 87° E, 28.0 lks. dist., mkd. 1/4 S27, BT.



BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO


IN SECTION 27

00.000 The 1/4 sec. cor. for Section 27 and Section 34 heretofore described.

Thence N 00° 35' 46" W on the meridional centerline of Section 27.

19.788 Point for the C-S 1/16 sec. cor. of Section 27 at proportionate distance.

Set an aluminum post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, in ring of stone, with aluminum cap mkd.



1975

LS 4971


from which

A Ponderosa Pine, 11 ins. in diam., bears S 72° E, 29.4 lks. dist., mkd. X BT.
A Ponderosa Pine, 10 ins. in diam., bears N 60° W, 31.2 lks. dist., mkd. X BT.

Thence continuing N 00° 35' 46" W

39.576 Point for the C 1/4 sec. cor. of Section 27 at the intersection of the latitudinal centerline of Section 27.

Set an aluminum post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, in ring of stone, with aluminum cap mkd.



1975

LS 4971

from which

A Fir, 10 ins. in diam., bears S 75° W, 44.3 lks. dist., mkd. X BT.
A Ponderosa Pine, 22 ins. in diam., bears N 38° W, 148.2 lks. dist., mkd. X BT.

Thence continuing N 00° 35' 46" W.


80.286 The 1/4 sec. cor. of Section 22 and Section 27 heretofore described.

00.000 The 1/4 sec. cor. for Section 27 and Section 28 heretofore described.

Thence N 87° 53' 08" E on the latitudinal centerline of Section 27.

20.101 Point for the C-W 1/16 section corner at proportionate distance

Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground in a ring of stone with aluminum cap mkd.



1975

LS 4971

from which

A Juniper, 5 ins. in diam., bears N 18° W, 10.3 lks. dist., mkd. X BT.
A Juniper, 6 ins. in diam., bears N 83° W, 13.0 lks. dist., mkd. X BT.

A 3/4 ins. diam. iron pipe representing the Northeast corner of Sacramento tracts subdivision bears S 53° 12' 15" E 2.342 lks. dist.


Thence continuing N 87° 53' 08" E.

40.202 Point for the C 1/4 sec. cor. of Section 27 at the intersection of the meridional centerline of Section 27.

Set aluminum post heretofore described.

Thence continuing N 87° 53' 08" E.

80.534 The 1/4 sec. cor. for Section 27 and Section 26 as evidenced by a firmly set GLO iron post projecting 2 feet above the ground in a mound of stone with brass cap mkd.



1938


No bearing trees found.

00.000 The W 1/16 sec. cor. for Section 27 and Section 34 heretofore described.

Thence N 00° 24' 31" W on the meridional centerline of the SW 1/4 of Section 27.

19.953 Point for the SW 1/16 sec. cor. for Section 27 at the intersection of the latitudinal centerline of the SW 1/4 of Section 27. Points fall in Hay Canyon Road.

At True Point for the corner set a 1 ins. diam. rebar, 36 ins. long. Set a witness corner on the latitudinal centerline of the SW 1/4 100 lks. east of the True corner point. Witness corner is an aluminum post, 30 ins. long, 2 1/2 ins. in diam., 20 ins. in the ground encircled by a mound of stone to top of aluminum cap mkd.



1975

LS 4971

from true corner point

A twin Ponderosa Pine, 14 ins. in diam., bears N 48° E, 83.7 lks. dist., mkd. X BT.
A Ponderosa Pine, 14 ins. in diam., bears N 77° E, 120.0 lks. dist., mkd. X BT.
from witness corner (Same BT's as above)
A twin Ponderosa Pine, 14 ins. in diam., bears N 35° W, 68.2 lks. dist., mkd. X BT.
A Ponderosa Pine, 14 ins. in diam., bears N 35° E, 31.4 lks. dist., mkd. X BT.

Thence continuing N 00° 24' 31" W.

39.914 The C-W 1/16 sec. cor. for Section 27 heretofore described.

00.000 The S 1/16 sec. cor. for Section 27 and Section 28 heretofore described.


Thence N 87° 23' 58" E on the latitudinal centerline of the SW 1/4 of Section 27.

20.178 Point for the SW 1/4 sec. cor. of Section 27 at the intersection of the meridional centerline of Section 27.

Set an aluminum post heretofore described.

Thence continuing N 87° 23' 58" E.

40.352 The C-S 1/16 sec. cor. for Section 33 heretofore described.

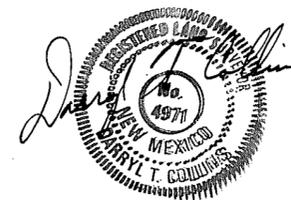

**BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO**

A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

EXTERIOR BOUNDARY - SECTION 33

00.000 The sec. cor. for Sections 27, 28, 33 & 34, T17S, R13E, NMPM heretofore described.
Thence S 87° 20' 50" W between Sections 28 and 33. (Record S 87° 21' W).

20.087 Point for the E 1/16 sec. cor. for Section 28 and Section 33 at proportionate distance.
Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, encircled by a ring of stone, with aluminum cap mkd.

E $\frac{1}{16}$ $\frac{S28}{S33}$

1975

LS 4971

from which
A Ponderosa Pine, 7 ins. in diam., bears N 48° W, 8.5 lks. dist., mkd. X BT.
A Ponderosa Pine, 9 ins. in diam., bears N 15° E, 36.7 lks. dist., mkd. X BT.
Thence continuing S 87° 20' 50" W

40.174 (Record 40.12) The 1/4 sec. cor. for Section 28 and Section 33 as evidenced by a firmly set GLO iron post projecting 18 ins. above the ground in a mound of stone with brass cap mkd.

N $\frac{1}{4}$ $\frac{S28}{S33}$

1938

No bearing trees found.

00.000 Thence S 87° 10' 05" W, continuing between Sections 28 and 33, beginning new measurement. (Record S 87° 08' W).

20.429 Point for the W 1/16 sec. cor. for Section 28 and Section 33 at proportionate distance.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in ring of stone, with aluminum cap mkd.

W $\frac{1}{16}$ $\frac{S28}{S33}$

1975

LS 4971

from which
A Ponderosa Pine, 12 ins. in diam., bears N 09° W, 33.3 lks. dist., mkd. X BT.
A Ponderosa Pine, 10 ins. in diam., bears S 74° W, 58.6 lks. dist., mkd. X BT.

40.858

Thence continuing S 87° 10' 05" W.

(Record 40.91) The sec. cor. for Sections 28, 29, 32 and 33, T17S, R13E, NMPM, as evidenced by a firmly set 2 ins. in diam., iron pipe filled with concrete. No brass cap exists on the pipe.

from which
A Spruce, 34 ins. in diam., bears N 60° E, 38.6 lks. dist., blaze illegible.
A Ponderosa Pine, 17.2 ins. in diam., bears S 9° W, 75.8 lks. dist., blaze illegible.
A Oak, 9 ins. in diam., bears N 37° E, 83.3 lks. dist., blaze illegible.
A Ponderosa Pine, 21 ins. in diam., bears N 11° W, 90.9 lks. dist., blaze illegible.

00.000

The sec. cor. for Sections 28, 29, 32 & 33 heretofore described.

Thence S 00° 00' 52" E between Sections 32 and 33 (Record South)

20.160

Point for the N 1/16 section corner for Section 32 and Section 33 at proportionate distance.

Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, encircled by a ring of stone, with an aluminum cap mkd.

N $\frac{1}{16}$
S32 | S33

1975

LS 4971

from which
A Ponderosa Pine, 11 ins. in diam., bears S 57° W, 57.7 lks. dist., mkd. X BT.
A Ponderosa Pine, 19 ins. in diam., bears N 35° E, 36.7 lks. dist., mkd. X BT.

Thence continuing S 00° 00' 52" E.

40.320

(Record 40.39) The 1/4 sec. cor. for Section 32 and Section 33 as evidenced by a firmly set GLO iron post projecting 12 ins. above the ground with brass cap mkd.

N $\frac{1}{4}$
S32 | S33

1938

from which
An Oak, 15 ins. in diam., bears S 68° W, 31.8 lks. dist., blaze grown over.
An Oak, 14 ins. in diam., bears N 63° E, 112.1 lks. dist., blaze grown over.

00.000

The sec. cor. for Sections 27, 28, 33 & 34 heretofore described.

Thence S 00° 10' 03" E between Sections 33 and 34 (Record S 0° 09' E).

20.128

The N 1/16 sec. cor. for Section 33 and Section 34 as evidenced by a firmly set iron post projecting 12 ins. above the ground with brass cap mkd.

USDA FS

T17S R13E

N $\frac{1}{16}$ 33 + 34

LS 3093

1975

from which
A Fir, 6 ins. in diam., bears N 56° E, 34.6 lks. dist., mkd. X BT.
A Ponderosa Pine, 12 ins. in diam., bears N 86° W, 63.4 lks. dist., mkd. X BT.

Thence continuing S 00° 10' 03" E.


40.276

The 1/4 sec. cor. for Section 33 and Section 34 as evidenced by a firmly set GLO iron post projecting 18 ins. above the ground in a mound of stone with brass cap mkd.

N $\frac{1}{4}$
S33 | S34

1938

from which
An Oak, 9 ins. in diam., bears S 45° W, 113.6 lks. dist., blaze grown over.

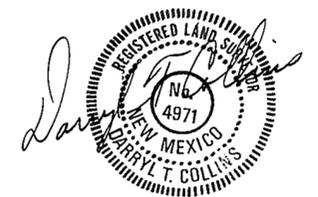


**BURKE /COLLINS /ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO**

A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33 SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

IN SECTION 33

00.000 The 1/4 sec. cor. for Section 28 and Section 33 heretofore described.
Thence S 00° 01' 43" W on the meridional centerline of Section 33.


20.205 Point for the C-N 1/16 sec. cor. of Section 33 at proportionate distance.
Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, encircled by a ring of stone, with aluminum cap mkd.



from which
A Ponderosa Pine, 9 ins. in diam., bears S 27° E, 20.5 lks. dist., mkd. X BT.
A Ponderosa Pine, 11 ins. in diam., bears N 40° E, 68.2 lks. dist., mkd. X BT.

Thence continuing S 00° 01' 43" W.


40.410 The C 1/4 corner of record as evidenced by a firmly set 2 ins. diam., iron pipe. Corner falls in a large open field.
Set an aluminum post witness corner on line 2.0 lks. north of the 2 in. iron pipe. Aluminum post is 30 ins. long, 2 1/2 ins. in diam., and is set 22 ins. in the ground, with aluminum cap mkd.

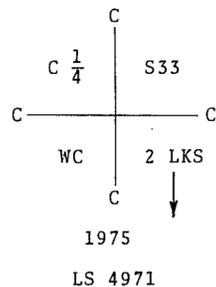

No bearing trees within limits

00.000 Thence S 00° 04' 03" W beginning new measurement.


40.441 The 1/4 sec. cor. for Section 33, T17S, R13E, NMPM and Section 4, T18S, R13E, NMPM as evidenced by a firmly set GLO iron post projecting 6 ins. above the ground with brass cap mkd.



from which
A rotted stump, bears S 35° W, 107 lks. dist., blaze illegible.

00.000 The 1/4 sec. cor. for Section 32 and Section 33 heretofore described.
Thence N 87° 15' 40" E on the latitudinal centerline of Section 33.

20.414 Point for the C-W 1/16 sec. cor. for Section 33 at proportionate distance.
Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with aluminum cap mkd.




from which
A Ponderosa Pine, 19 ins. in diam., bears S 74° W, 27.6 lks. dist., mkd. X BT.
A Ponderosa Pine, 10 ins. in diam., bears N 35° W, 64.4 lks. dist., mkd. X BT.

Thence continuing N 87° 15' 40" E.

40.828 The C 1/4 corner of record heretofore described. Set aluminum post heretofore described.

00.000 Thence N 87° 10' 27" E beginning new measurement.

20.159 Point for the C-E 1/16 sec. cor. at proportionate distance.
Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 18 ins. in the ground encircled by a ring of stone to top of aluminum cap mkd.



from which
A Ponderosa Pine, 8 ins. in diam., bears N 49° E, 56.8 lks. dist., mkd. X BT.
A Spruce, 7 ins. in diam., bears N 13° W, 16.5 lks. dist., mkd. X BT.

Thence continuing N 87° 10' 27" E.


40.318 The 1/4 sec. cor. for Section 33 and Section 34 heretofore described.

00.000 The E 1/16 sec. cor. for Section 28 and Section 33 heretofore described.

Thence S 00° 04' 12" E on the meridional centerline of the NE 1/4 of Section 33.

20.167 Point for the NE 1/16 sec. cor. of Section 33 at the intersection of the latitudinal centerline of the NE 1/4 of Section 33.

Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground encircled by a ring of stone to top of aluminum cap mkd.



from which
A Ponderosa Pine, 18 ins. in diam., bears S 59° W, 69.2 lks. dist. mkd. X BT.
A Ponderosa Pine, 15 ins. in diam., bears S 25° E, 58.2 lks. dist., mkd. X BT.

Thence continuing S 00° 04' 12" E.

40.343 The C-E 1/16 sec. cor. for Section 33 heretofore described.



BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE
RESURVEY, SUBDIVISION, AND MONUMENTATION OF SECTIONS 23, 26, 27 & 33
SITUATED IN T.17S., R.13E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

00.000 The W 1/16 sec. cor. for Section 28 and Section 33 heretofore described.

Thence S 00° 01' 01" W on the meridional centerline of the NW 1/4 of Section 33.

20.181 Point for the NW 1/16 sec. cor. of Section 33 at the intersection of the latitudinal centerline of the NW 1/4 of Section 33.

Set an aluminum post 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground aluminum cap mkd.

NW $\frac{1}{16}$

S33

1975

LS 4971

from which

A Pondeorsa Pine, 13 ins. in diam., bears S 86° W, 51.8 lks. dist., mkd. X BT.

A Ponderosa Pine, 12 ins. in diam., bears N 19° W, 33.3 lks. dist., mkd. X BT.

Thence continuing S 00° 01' 01" W.

40.364 The C-W 1/16 sec. cor. for Section 33 heretofore described.

00.000 The N 1/16 sec. cor. for Section 32 and Section 33 heretofore described.

Thence N 87° 11' 44" E on the latitudinal centerline of the NW 1/4 of Section 33.

20.423 Point for the NW 1/16 sec. cor. for Section 33 at the intersection of the meridional centerline of the NW 1/4 of Section 33.

Set an aluminum post heretofore described.

Thence continuing N 87° 11' 44" E.

40.844 The C-N 1/16 sec. cor. for Section 33 heretofore described.

00.000 The N 1/16 sec. cor. for Section 33 and Section 34 heretofore described.

Thence S 87° 14' 46" W on the latitudinal centerline of the NE 1/4 of Section 33.

20.120 Point for the C 1/4 sec. cor. for Section 33 at the intersection of the meridional centerline of the NE 1/4 of Section 33.

Set an aluminum post heretofore described.

Thence continuing S 87° 14' 46" W.

40.246 The C-N 1/16 sec. cor. for Section 33 heretofore described.

STATE OF NEW MEXICO } ss.
OTERO COUNTY }
FILED FOR RECORD IN MY OFFICE
on 16 day of October 1975
at 9:45 a.m. and duly recorded
Book No. 19 Page 42-50
to records of Otero County, New Mexico.
Frankie Dean
County Clerk, Otero County, New Mexico
By Carol Clark Deputy

BK 19 PGS 42-50

9 OF 9

SHEET 9 of 9



BURKE / COLLINS / ASSOCIATES
CONSULTING ENGINEERS
SURVEYORS
ALAMOGORDO, NEW MEXICO

DRAWN BY: CHECKED BY: DATE:
D.T.C. DTC VRC 8/75

11449