


RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTION 26, A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE

8

SITUATED IN T. 17S., R. 14E., NEW MEXICO PRINCIPAL MERIDIAN, NEW MEXICO

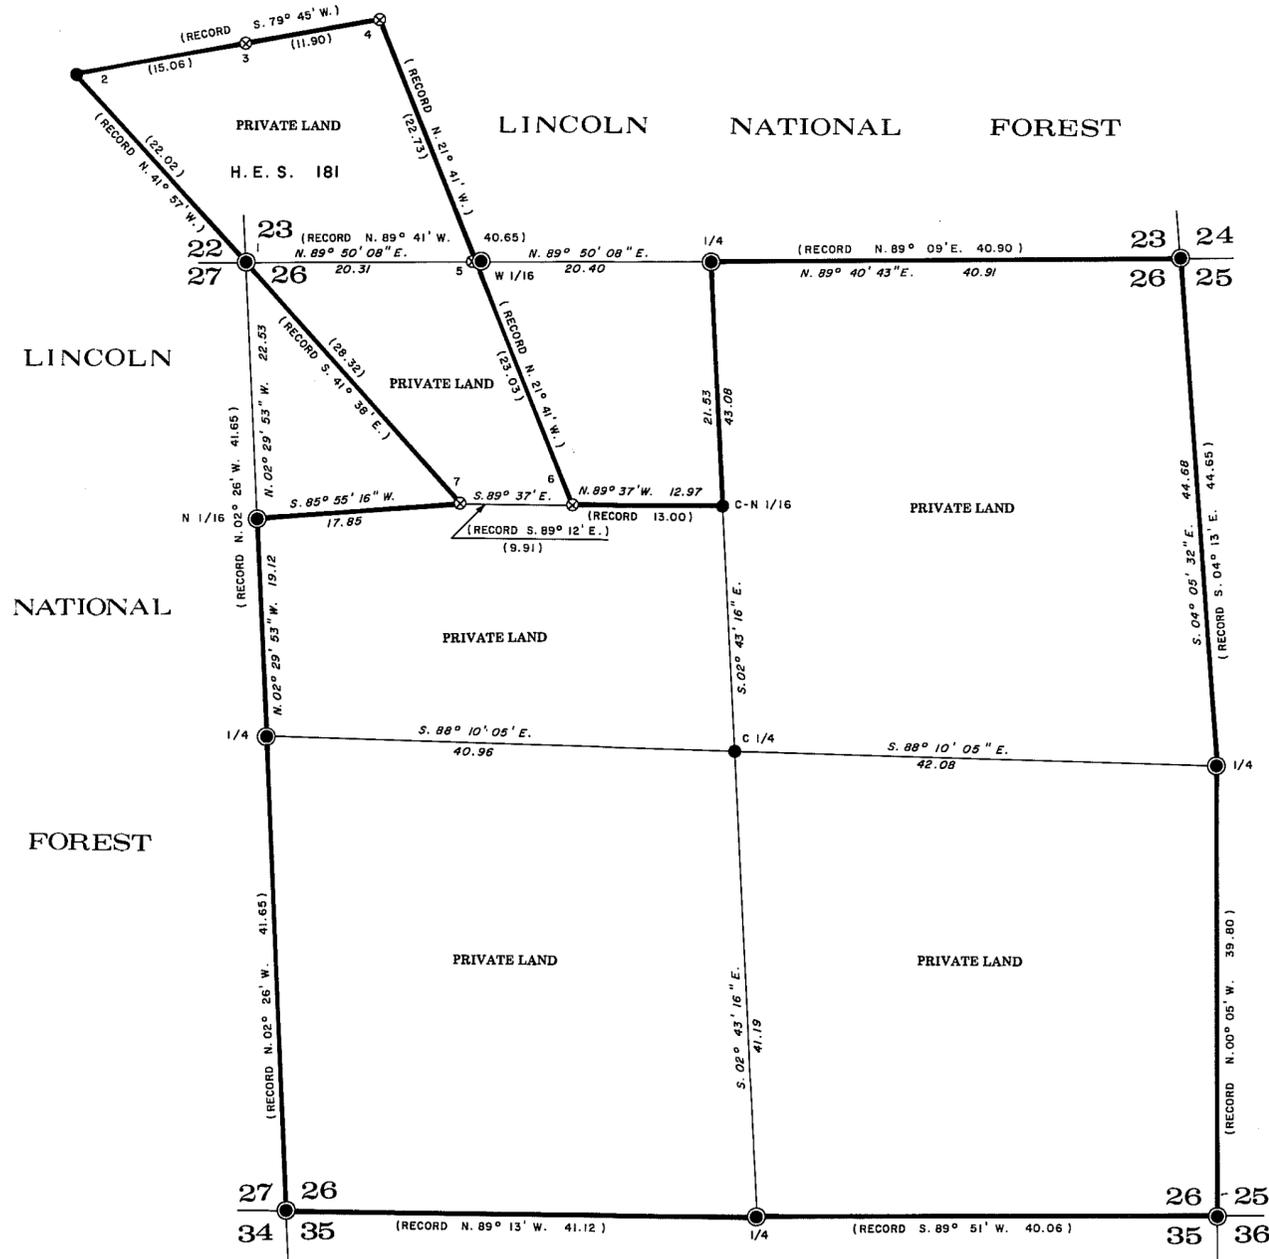

This plat represents a record of the partial subdivision of Section 26, T. 17S., R. 14E., N.M.P.M., New Mexico which constitutes a portion of the property lines of the Lincoln National Forest.

I certify this survey was performed by Victor R. Crawford, Forest Service Surveying Technician, under my direction and that same is true and correct to the best of my knowledge.

Survey completed September, 1975.




Charles C. Doak, Regional Land Surveyor, Southwestern Region, Albuquerque, New Mexico.

Charles C. Doak

Assistants: V.R. Crawford, R.W. Saenz, J. Romero, J. Fields

Party Chief Instrumentman Asst. CHARLES C. DOAK

- LEGEND**
- CORNER REMONUMENTED/MONUMENTED.....●
 - FOUND G.L.O. OR B.L.M. BRASS CAP.....●
 - FOREST SERVICE CLASS "A" CORNER.....●
 - BOUNDARY OF NATIONAL FOREST LAND.....—
 - PORTION OF SURVEY NOT A FOREST SERVICE PROPERTY LINE.....—

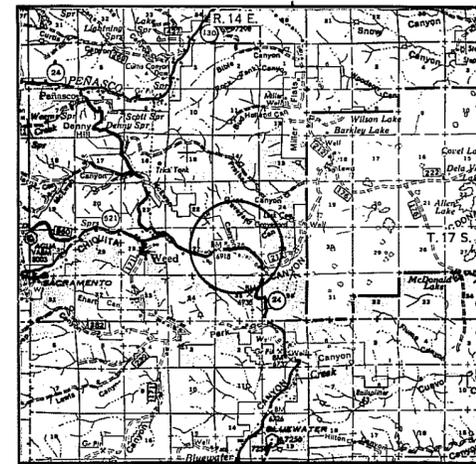

NOTE: AZIMUTH DETERMINED BY SOLAR OBSERVATION.

NOTE: DISTANCES MEASURED WITH ELECTRONIC MEASURING DEVICE.

THIS PLAT PREPARED BY BOHANNAN WESTMAN HUSTON & ASSOC., INC. FROM DATA FURNISHED BY THE U.S.D.A. FOREST SERVICE.

BK 20 PG 8

SHEET 1 OF 2

1 OF 2

U.S. Department of Agriculture
FOREST SERVICE
 SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

Checked by *[Signature]* Approved by *CC Doak* Date *11/6/75*

RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTION 26, A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINE

9

NOTE: Forest Service Sign Designations: 54-2 PROPERTY BOUNDARY
54-3 BEARING TREE
54-4 ATTENTION

<p>Chains</p> <p>00.00 Beginning at the 1/4 corner of sections 26 and 27, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">1/4 S27 S26 1941</p> <p>No bearing trees were found. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Observe the sun and determine bearing N.02°29'53"W., (record: N.02°26'W.).</p> <p>Ascend over southeast slope.</p> <p>Thence between sections 26 and 27.</p> <p>3.45 Ravine drains southeast.</p> <p>Thence ascend southwest slope.</p> <p>19.12 At which point</p> <p>Intersect the N 1/16 corner of sections 26 and 27, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S27 S26 1941</p> <p>from which old bearing tree A pinon, 6 ins. diam., bears N.45°W., 41 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Continue N.02°29'53"W.</p> <p>22.12 Top of ridge bears southeast.</p> <p>41.64 (Record: 41.65) at which point</p> <p>Intersect the corner of sections 22, 23, 26 and 27, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">S22 S23 S27 S26 1941</p> <p>No bearing trees found in burned area, (Spring Fire). This corner is also corner No. 1 of H.E.S. 181. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Thence</p> <p>00.00 From the corner of sections 22, 23, 26 and 27, previously described.</p> <p>N.89°50'08"E. (record: N.89°41'W.).</p> <p>18.00 Arroyo (McEwan Canyon)</p> <p>18.09 Intersect corner No. 5 of H.E.S. No. 181 which is a limestone, 8 x 8 ins., projecting 6 ins. above the ground and mkd. CC on the west face, and HES 181 No. 5 on the south face.</p> <p>20.31 At which point</p> <p>Intersect the W 1/16 corner of sections 23 and 26, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">W 1/16 S23 S26 1941</p> <p>from which old bearing tree A pine, 6 ins. diam., bears N.80°E., 14 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Continue N.89°50'08"E.</p> <p>40.70 (Record: 40.65) at which point</p> <p>Intersect the 1/4 corner of sections 23 and 26, as evidenced by a standard GLO iron post, projecting 8 ins. above the ground with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">1/4 S23 S26 1941</p> <p>from which old bearing tree A pinon, 6 ins. diam., bears N.81°W., 23 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.</p>	<p>Thence</p> <p>00.00 From the 1/4 corner of sections 23 and 26, previously described.</p> <p>N.89°40'43"E. (record: N.89°09'E.) between sections 23 and 26.</p> <p>Descend northeast slope.</p> <p>14.52 Top of small ridge bears northeast.</p> <p>40.15 Graveyard Canyon drains southeast.</p> <p>40.91 (Record: 40.90) at which point</p> <p>Intersect the section corner of sections 23, 24, 25 and 26, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground, with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">S23 S24 S26 S25 1941</p> <p>No bearing trees found in burned area, (Spring Fire). Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Thence</p> <p>00.00 From the section corner of sections 23, 24, 25 and 26, as previously described.</p> <p>S.04°05'32"E., (record: S.04°13'E.), between sections 25 and 26.</p> <p>Over fairly level land.</p> <p>18.60 Draw, drains northeast.</p> <p>Ascend north gradual slope.</p> <p>40.00 Top of ridge bears northwest and southeast.</p> <p>44.68 (Record: 44.65) at which point</p> <p>Intersect the 1/4 corner of sections 25 and 26, as evidenced by a standard GLO iron post, projecting 8 ins. above the ground, with mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">1/4 S26 S25 1941</p> <p>from which old bearing tree A pinon, 6 ins. diam., bears S.57°E., 23 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>Thence</p> <p>00.00 From the 1/4 corner of sections 26 and 27, as previously described.</p> <p>S.88°10'05"E. along the latitudinal centerline of section 26.</p> <p>40.96 Point of intersection.</p> <p>At which point</p> <p>Set an iron post, 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground, and raise a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">USDA FS T17S R14E C C 1/4 S26 C L.S. 3093 1975</p> <p>No bearing trees available. Corner falls in the middle of a cultivated field and south of State Highway No. 24, to Pinon.</p> <p>83.04 Continue S.88°10'05"E.</p> <p>00.00 From the 1/4 corner of sections 23 and 26, as previously described.</p> <p>S.02°43'16"E., along the meridional centerline of sections 26.</p> <p>21.53 Proportionate distance.</p> <p>At which point</p> <p>Set an iron post, 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground, with raised mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">USDA FS T17S R14E C C-N 1/16 S26 C L.S. 3093 1975</p> <p>from which new bearing tree A juniper, 4 ins. diam., bears S.74°E., 20 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p>	<p>Continue S.02°43'16"E.</p> <p>43.08 At which point</p> <p>Intersect the C 1/4 corner, as previously described.</p> <p>Continue S.02°43'16"E.</p> <p>84.27 At which point</p> <p>Intersect the 1/4 corner of sections 26 and 35, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground, with a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">1/4 S26 S35 1941</p> <p>from which old bearing trees A juniper, 20 ins. diam., bears S.59°E., 14 lks. dist. A juniper, 14 ins. diam., bears N.41°W., 23 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing trees. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>00.00 From the C-N 1/16 corner, as previously described.</p> <p>N.89°37'W. on true line to corner No. 6 of H.E.S. 181.</p> <p>12.97 (Record: 13.00) at which point</p> <p>Intersect corner No. 6 of H.E.S. 181, as evidenced by a granite stone, projecting 6 ins. above the ground and firmly set, mkd. on the west face H.E.S. 181 and X on top and a small mound of stone.</p> <p>No bearing trees found.</p> <p>Thence</p> <p>I oriented my instrument on the C-N 1/16 corner as previously described. Flip and intersect corner No. 7 of H.E.S. 181, as evidenced by a granite stone, projecting 8 ins. above the ground and firmly set, mkd. on the northeast face 7 H.E.S. 181 and X on top, with a small mound of stone.</p> <p>Note: The bearing N.89°37'W., does not intersect the N 1/16 corner between sections 26 and 27, the bearing from the H.E.S. 181 corner No. 7 to the original N 1/16 corner is S.86°55'16"W., 17.85 chs. dist.</p> <p>00.00 Beginning at the section corner of sections 22, 23, 26 and 27, which is also the No. 1 corner of H.E.S. 181, as evidenced by a standard GLO iron post and original stone projecting 6 ins. above the ground and a mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">S22 S23 S27 S26 1941</p> <p>No bearing trees found in burned area, (Spring Fire).</p> <p>S.41°38'E. (record bearing).</p> <p>28.32 (Record) , at which point</p> <p>Intersect corner No. 7 of H.E.S. 181, which is a granite stone, projecting 8 ins. above the ground and firmly set, mkd. on northeast face 7 H.E.S. 181 and X on top, with small mound of stone.</p> <p>No bearing trees found. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>00.00 Thence</p> <p>S.89°37'E., (record: S.89°12'E.).</p> <p>9.91 (Record) at which point</p> <p>Intersect corner No. 6 of H.E.S. 181, which is a granite stone, projecting 6 ins. above the ground and firmly set, mkd. on the west face 6 H.E.S. 181 and X on top with a small mound of stone.</p> <p>No bearing trees found. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p>	<p>00.00 Thence</p> <p>N.21°41'W. (record).</p> <p>23.03 (Record), at which point</p> <p>Intersect corner No. 5 of H.E.S. 181, which is a granite stone projecting 5 ins. above the ground and firmly set, mkd. on the west face 5 H.E.S. 181 and CC on the north face. The W 1/16 corner for sections 23 and 26, bears N.89°50'08"E., 10 lks. dist.</p> <p>from which old bearing tree A pine, 8 ins. diam., bears N.04°E., 14 lks. dist.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>00.00 Thence</p> <p>Continue N.21°41'W. (record).</p> <p>22.73 (Record) at which point</p> <p>Intersect corner No. 4 of H.E.S. 181, which is a granite stone projecting 8 ins. above the ground and firmly set, mkd. on the southeast face 4 H.E.S. 181, with a mound of stone.</p> <p>No bearing trees found. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>00.00 Thence</p> <p>S.79°45'W. (record).</p> <p>11.90 (Record) at which point</p> <p>Intersect corner No. 3 of H.E.S. 181, which is a granite stone projecting 5 ins. above the ground and firmly set, mkd. 3 H.E.S. 181 on the southeast face and CC on the west. The S 1/16 corner of sections 22 and 23 bears N.03°E., 1.45 lks. dist.</p> <p>from which old bearing tree A pinon, 6 ins. diam., bears S.84°E., 1.33 lks. dist., scribing visibly mkd. 3 H.E.S. 181 BT.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing tree. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p> <p>00.00 Thence</p> <p>Continue S.79°45'W. (record).</p> <p>15.06 (Record) at which point</p> <p>Set a temporary point for corner No. 2 of H.E.S. 181.</p> <p>00.00 From the corner of sections 22, 23, 26 and 27, as previously described.</p> <p>I oriented my instrument on a previously determined bearing.</p> <p>Thence</p> <p>N.41°57'W. (record).</p> <p>22.02 (Record) proportionate position.</p> <p>At which point</p> <p>Intersect the temporary point for corner No. 2 of H.E.S. 181.</p> <p>Set an iron post, 2 1/2 ins. diam., 29 ins. long, 20 ins. in the ground and raised mound of stone to top, with brass cap mkd.</p> <p style="text-align: center;">USDA FS T17S R14E H.E.S. 181 No. 2 SEC 22 L.S. 3093 1975</p> <p>from which new bearing trees A pine, 30 ins. diam., bears West, 2.18 chs. and mkd. X BT 2. A pine, 30 ins. diam., bears N.15°E., 1.15 chs. mkd. X BT 2.</p> <p>Attach standard U.S. Forest Service sign 54-3 to bearing trees. Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.</p>
---	--	---	--

Note: All corners were intervisible. No distances were measured except for establishing corner No. 2 of H.E.S. 181.

STATE OF NEW MEXICO
OTERO COUNTY
FILED FOR RECORD IN MY OFFICE
27 Jan 1976
A. J. 3155
Book 20 - Pg. 8-9
County Clerk, Otero County, New Mexico
Frankie Dean
Deputy

REGISTERED LAND SURVEYOR
STATE OF NEW MEXICO
No. 3093
CHARLES C. DONA

BK 20 PG 9



U.S. Department of Agriculture
FOREST SERVICE
SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

Checked by YPC Approved by CRD/DAK Date 11/6/75

13607