




# PARTIAL SUBDIVISION OF SECTION 33, A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINES AMENDED PLAT

**Chains**

00.00 Beginning at the  $\frac{1}{4}$  corner of sections 4 and 33, as evidenced by a standard GLO iron post, projecting 8 ins. above the ground with mound of stone to top, with brass cap mkd.:



from which the old bearing tree:  
 A Pine, 6 ins. diam., bears S. 47° 30' W., 21 lks. dist., scribed with  $\frac{1}{4}$  S4 BT.

Attach standard U.S. Forest Service sign 54-3 to bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.


Observe sun and determine bearing.

Thence

00.00 N. 01° 33' W., along the meridional centerline of section 33.

20.38 At proportionate distance

Set an iron post, 2 $\frac{1}{2}$  ins. diam., 29 ins. long, 2/3 in the ground with a mound of stone to top, with brass cap mkd.:



from which the new bearing tree:  
 A Pinon, 4 ins. diam., bears S. 77° W., 63 lks. dist., mkd. X BT.


No other bearing trees available.

Attach standard U.S. Forest Service sign 54-3 to bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue N. 01° 33' W.

40.76 At which point  
 Set an iron post, 2 $\frac{1}{2}$  ins. diam., 29 ins. long, 2/3 in the ground in mound of stone to top, with brass cap mkd.:



from which the new bearing tree:  
 A Juniper, 30 ins. diam., bears East 41 lks. dist., mkd. C $\frac{1}{4}$  S33 BT.


No other bearing trees available.

Attach standard U.S. Forest Service sign 54-3 to bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Continue N. 01° 33' W.

81.48 At which point  
 Intersect the  $\frac{1}{4}$  corner of sections 28 and 33, as evidenced by a standard GLO iron post, projecting 8 ins. above the ground with a mound of stone to top, with brass cap mkd.:



from which the old bearing tree:  
 A Dead Pine, 14 ins. diam., bears N. 60° E., 25 lks. dist., (record).


Attach standard U.S. Forest Service sign 54-3 to bearing tree.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

**Forest Service Sign Designations:**

- 54-2 = Property Boundary
- 54-3 = Bearing Tree
- 54-4 = Attention

At the  $\frac{1}{4}$  corner of sections 33 and 34, as evidenced by a standard GLO iron post, projecting 6 ins. above the ground with a small mound of stone to top, with brass cap mkd.:



No bearing trees were found.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service sign 54-4.


Thence

00.00 S. 89° 46' W., along the latitudinal centerline of section 33.

40.00 At which point  
 Intersect the C $\frac{1}{4}$  corner, previously described.

Continue S. 89° 46' W.

82.04 At which point  
 Intersect the  $\frac{1}{4}$  corner of sections 32 and 33, as evidenced by a standard GLO iron post, projecting 8 ins. above the ground with a mound of stone to top, with brass cap mkd.:



from which the old bearing trees:  
 A Pinon, 4 ins. diam., bears N. 86° W., 47 lks. dist., mkd.  $\frac{1}{4}$  S32 BT.  
 A Juniper, 8 ins. diam., bears S. 31° E., 21 lks. dist., mkd.  $\frac{1}{4}$  S33 BT.


Attach standard U.S. Forest Service sign 54-3 to bearing trees.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Thence

S. 1° 05' W., (record S. 1° 04' W.)  
 Between sections 32 and 33,

20.33 (Record 20.455) at which point  
 Intersect the S 1/16 corner of sections 32 and 33 as evidenced by a standard GLO iron post projecting 14 ins. above ground in a mound of stone with brass cap mkd.:



from which the old bearing trees:  
 A Juniper, 10 ins. diam., bears S. 75° E., 40 lks. dist., mkd.  $\frac{1}{4}$  S33 BT.  
 A Pine, 16 ins. diam., bears N. 42° W., 24 lks. dist., mkd.  $\frac{1}{4}$  S32 BT.

Attach U.S. Forest Service sign 54-3 to bearing trees.

Thence


N. 89° 50' E.  
 Along the latitudinal centerline of the SW  $\frac{1}{4}$  of section 33.

42.98 At which point  
 Intersect the C-S 1/16 corner, previously described.

Thence

N. 89° 49' E.  
 Along the latitudinal centerline of the SE  $\frac{1}{4}$  of section 33.

39.70 Intersect the S 1/16 corner of sections 33 and 34, as evidenced by a standard GLO iron post, projecting 10 ins. above the ground with a large mound of stone to top, with brass cap mkd.:



from which the old bearing trees:  
 A Pinon, 6 ins. diam., bears S. 16° 30' E., 10 lks. dist., mkd. S 1/16 S34 BT.  
 A Pine, 8 ins. diam., bears S. 25° 30' W., 12 lks. dist., mkd. S 1/16 S33 BT.


Attach standard U.S. Forest Service sign 54-3 to bearing trees.

Drive a 5 ft. steel post alongside the corner and attach standard U.S. Forest Service signs 54-2 and 54-4.

Thence

N. 00° 43' W., (record N. 00° 45' W.)  
 Between sections 33 and 34.

20.41 (Record) at which point  
 Intersect the  $\frac{1}{4}$  section corner of sections 33 and 34 previously described.

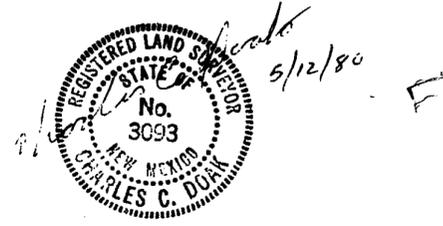

STATE OF NEW MEXICO }  
 OTERO COUNTY }  
 FILED FOR RECORD IN MY OFFICE  
 This day of May 19 80  
 Notary Public A.M. duly recorded  
 In Book No. 26 Page 2233  
 In presence of  
 Margaret Sanchez  
 Delores Chavez

U.S. DEPARTMENT OF AGRICULTURE  
 FOREST SERVICE  
 SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

WER