

DEPENDENT RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTION 9, T16S R13E, N.M.P.M., A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINES.

CERTIFICATION

This plat represents a record of the Dependent Resurvey, subdivision and monumentation of section 9, T16S, R13E, NMPM, Otero, County, New Mexico, which constitutes a portion of the property boundary of Lincoln National Forest. The original survey of T16S, R13E was executed by Leonard M. Brown, U.S. Deputy Surveyor in 1890. A Dependent Resurvey was made in 1936 by Clark Gumm, Public Land Surveyor of the U.S. General Land Office. The north boundary of section 9 was resurveyed in 1966 by Lloyd D. Absher, Supervisory Cadastral Surveyor of the Bureau of Land Management. These surveys are a record of the BLM in Santa Fe. The N 1/2 NW 1/4 was subdivided and platted as Robin Hood Estates in 1964. The E 1/2 NE 1/4 and NE 1/4 SE 1/4 was subdivided and platted as Cloud Country Subdivision, Unit 2, in 1973. This Dependent Resurvey, Subdivision, monumentation and record thereof was made at the request of the Supervisor, Lincoln National Forest, for the purpose of identifying and perpetuating the evidence of the previous official surveys and is intended for his exclusive use. I certify that this Dependent Resurvey, subdivision, monumentation and record thereof was made by me or my assistants under my supervisory direction and that same is true and correct to the best of my knowledge. Surveyed in July and August 1984.


Wilfried E. Roeder

Wilfried E. Roeder, Registered Land Surveyor, New Mexico No. 4691. Lincoln National Forest, Alamogordo, New Mexico.

NOTE:

This survey was executed in accordance with the instructions set forth in the BLM "Manual of Instructions for the survey of the Public Lands of the United States-1973" using a one second direction theodolite and electronic distance measuring equipment. The direction of lines are based on angular measurement from an initial bearing obtained from the 1936 record bearing for the north 1/2 mile of the west boundary of section 9. Distances were measured on the slope in feet and converted by vertical angle measurement to horizontal chains and links. All monuments established as a result of this survey consist of an aluminum post, 2 1/2 ins diam., 30 ins. long, with Forest Service cap.

Wilfried E. Roeder
NEW MEX. 12/28/84

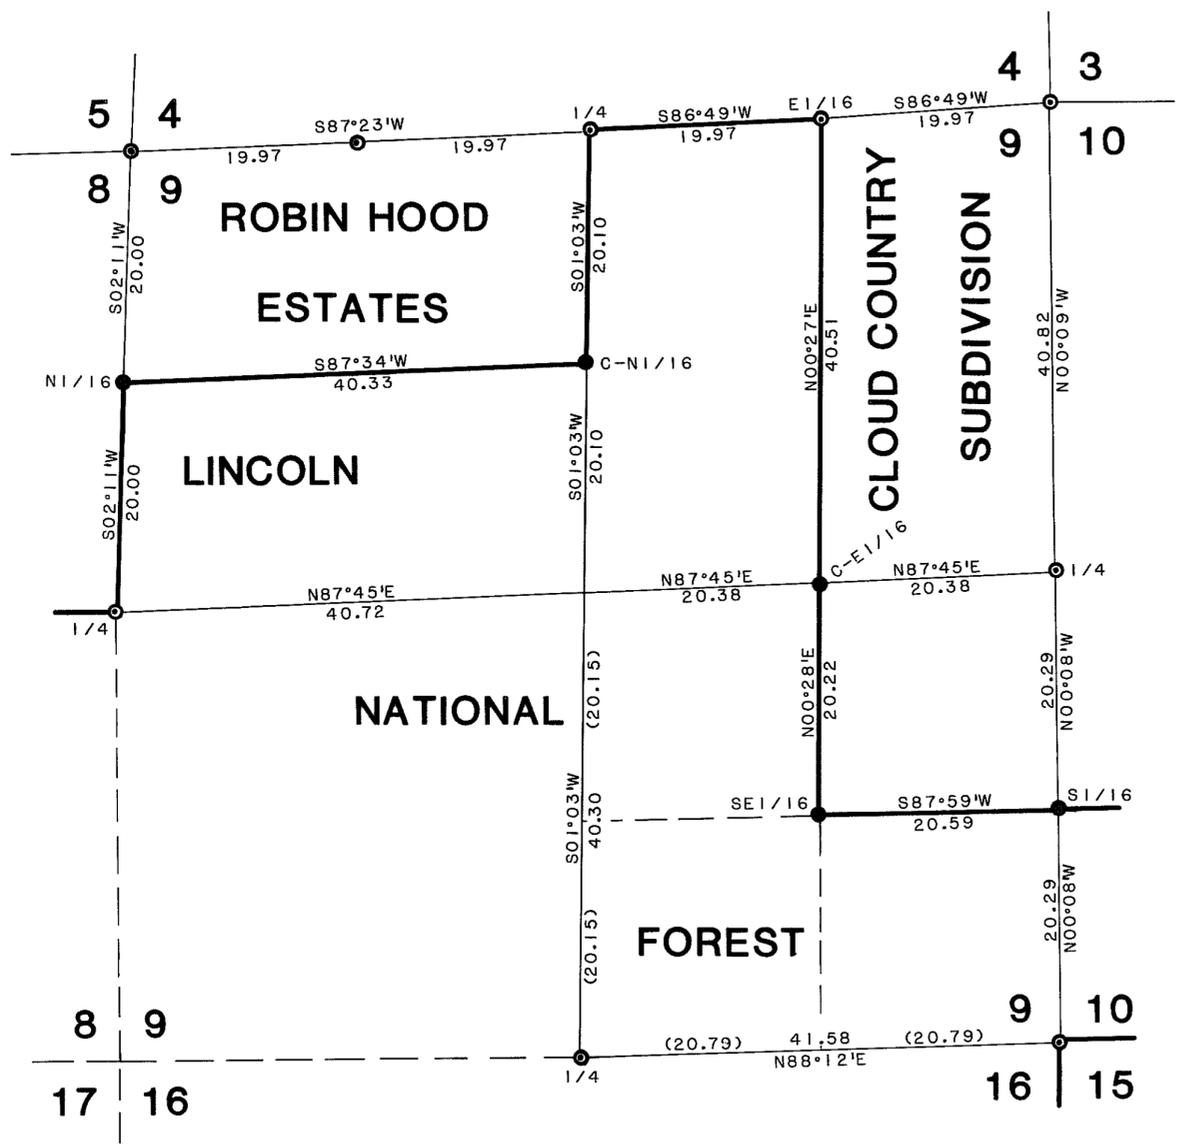


FOREST SERVICE SIGN DESIGNATION

- 54-2 Property boundary
- 54-3 Bearing tree
- 54-9 Land survey monument

LEGEND

- Forest Service Boundary-----
- Portion of survey-----
- Line not included in this survey-----
- Corner monumented or remonumented-----
- Found GLO or BLM monument-----

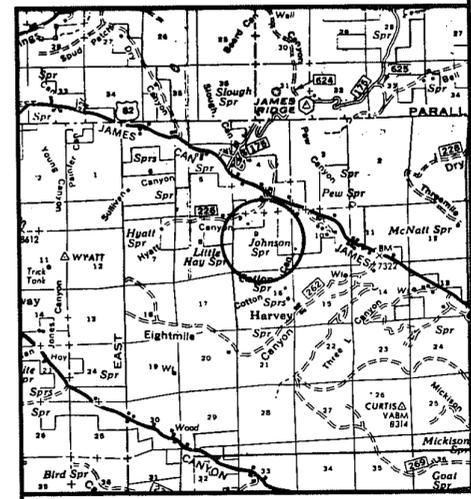

U.S. Department of Agriculture
FOREST SERVICE
SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO

RECORD OF SURVEY

T16S, R13E, Sec. 9

DEPENDENT RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTION 9, T16S, R13E,
 N.M.P.M., A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINES.

23

Commence this survey at the 1/4 section corner of sections 8 and 9, as evidenced by a GLO iron post, firmly set, proj. 6 ins above ground, with brass cap mkd.

1/4
 S81S9
 1936

from which old bearing trees;

A fir, 20 ins. diam., bears N11 1/2°W, 44 lks. dist., (record) with an overgrown blaze.

Attach FS sign 54-3.

A fir, 10 ins. diam. bears S14 1/4°E, 28 lks. dist., (record) with an overgrown blaze.

Attach FS signs 54-3.

Found steel post with FS signs 54-2 and 54-9 attached alongside corner.

Chains

00.00 Thence

N87°45'E, along the latitudinal centerline of section 9.

40.72 Intersect the meridional centerline, not monumented.

61.10 Proportional distance for C-E 1/16 corner at which point set an aluminum post, 30 ins. long, 25 ins in ground, with cap mkd.

T16SR13E
 C-E 1/16
 S9
 LS4691
 1984

from which;

A pinon, 9 ins diam., bears S60°W, 20 lks. dist.,

mkd. XBT

Attach FS sign 54-3

A pinon, 12 ins. diam., bears N56°W, 18 1/2 lks. dist.,

mkd. XBT.

Attach FS sign 54-3

Continue N87°45'E

81.48 At which point

Intersect the 1/4 section corner of sections 9 and 10, as evidenced by a GLO iron post, firmly set, proj. 12" above ground, with brass cap mkd.

1/4
 S91S10
 1936

00.00 Thence
 N00°09'W (record: N0°10'W) between sections 9 and 10
 (record: 40.83) at which point
 40.82 Intersect the corner of sections 3,4,9 and 10 as evidenced by a GLO iron post, firmly set, proj. 4 ins above ground, with brass cap mkd.

T16SR13E
 S41S3
 S9 S10
 1936

00.00 Thence
 S86°49'W (record: S86°53'W) between sections 4 and 9
 19.97 (record: 20.00) at which point
 Intersect the E 1/16 corner as evidenced by a BLM iron post, firmly set, proj. 2 ins. above ground, with brass cap mkd.

T16SR13E
 E 1/16 S4
 S9
 1966

39.94 Continue S86°49'W, between sections 4 and 9 (record: 40.00) at which point
 Intersect the 1/4 section corner of sections 4 and 9 as evidenced by a GLO iron post, firmly set, proj. 5 ins. above ground, with brass cap mkd.

S4
 1/4 S9
 1978
 1936

from which an old bearing tree:

An oak, 26 ins diam., bears S66 1/4°W, 49 lks. dist. (record) with an overgrown blaze.

00.00 Thence
 S01°03'W, along the meridional centerline of section 9

20.10 Proportional distance for C-N 1/16 corner at which point
 Set an aluminum post, 30 ins. long, 21 ins. in ground with cap mkd.

T16SR13E
 CN 1/16
 S9
 LS4691
 1984

from which

A white fir, 14 ins. diam., bears S84°E, 23 1/2 lks. dist., mkd XBT.

Attach FS signs 54-3 and 54-9.

A douglas fir, 24 ins diam., bears S20°W, 55 lks. dist., mkd XBT.

Attach FS sign 54-3.

Continue S01°03'W

40.20 Intersect the latitudinal centerline, not monumented

60.35 Proportional point for C-S 1/16 corner, not monumented.

80.50 At which point;

Intersect the 1/4 section corner of sections 9 and 16 as evidenced by a GLO iron post, firmly set, proj. 6 ins. above ground, with brass cap mkd.

1/4 S9
 S16
 1936

from which old bearing trees:

A fir stump, 20 ins diam., bears S4 1/2°W, 23 lks. dist., (record)

A pine, stump, 20 ins diam., bears N12 1/4°W, 44 lks. dist. (record)

A pine, 14 ins. diam., bears N82 1/2°E, 32 lks. dist.,

mkd. 1/4 S9 BT. (not of record)

A white fir, 12 ins. diam., bears S24°E, 29 lks dist., mkd. 1/4 S16 BT. (not of record)

Michael & Rose
 12/28/84

DEPENDENT RESURVEY, SUBDIVISION AND MONUMENTATION OF SECTION 9, T16S, R13E,
 N.M.P.M., A PORTION OF THE LINCOLN NATIONAL FOREST PROPERTY LINES.

24

00.00 Thence
 N88°12'E (record) between sections 9 and 16
 20.79 Proportional distance for E 1/16 corner, not
 monumented
 41.58 (record: 41.66) at which point
 Intersect the corner of sections 9,10,15, and 16
 as evidenced by a GLO iron post, firmly set, proj.
 5 ins. above ground, with brass cap mkd.

T16SR13E
 S9 S10
 S16 S15
 1936

from which old bearing trees:
 A pine, 18 ins. diam., bears S63 1/4°E, 60 lks. dist.,
 (record).
 A pine, dead and down, place where tree stood bears
 S46°W, 62 lks. dist. (record).
 An oak, 18 ins. diam., dead, bears N57°E, 26 lks. dist.
 (record).
 A pine, 12 ins. diam., bears N62°W, 38 lks. dist.
 (record)

00.00 Thence
 N00°08'W (record: N0°11'W) between sections 9 and 10
 20.29 Proportional distance at which point
 Set an aluminum post, 30 ins. long, 24 ins. in ground, with
 cap mkd.

T16SR13E
 S1/16
 S9 S10
 LS4691
 1984

from which;
 A power pole bears S52°E, 76 lks. dist.
 Drive a steel post with FS signs 54-2 and
 54-9 attached alongside monument.
 Continue N00°08'W

40.58 (record: 40.61) at which point
 Intersect the 1/4 section corner of sections 9
 and 10, previously described.
 Return to the 1/4 section corner of sections 4
 and 9, previously described.

00.00 Thence
 S87°23'W (record: S87°22'W), between sections 4
 and 9
 19.97 (record) Intersect the W 1/16 corner as evidenced
 by a BLM iron post, firmly set, proj. 12 ins.
 above ground, with brass cap mkd.

T16SR13E
 W 1/16 S4
 S9
 1966

39.94 Continue S87°23'W
 (record at which point)
 Intersect the corner of sections 4,5,8 and 9
 as evidenced by a GLO iron post, firmly set,
 proj. 14 ins. above ground, with brass cap mkd.

T16SR13E
 S5 S4
 S8 S9
 1936

from which old bearing trees:
 An oak stump, 14 ins. diam., bears N16 1/4°E,
 38 lks. dist., no mark visible. (record)
 A pine, 10 ins. diam., bears N54 1/4°E, 38
 lks. dist., with an overgrown blaze. (record)
 A pine stump, 7 ins. diam., bears S58 3/4°E,
 22 lks. dist., (record) no mks. visible.
 A pine, 7 ins diam., bears N39°W, 37 lks. dist.,
 mkd. T16SR13E S5 BT. (record)

00.00 Thence
 S02°11'W (record) between sections 8 and 9
 20.00 At which point
 Intersect the N 1/16 corner as evidenced by a
 Forest Service aluminum post, firmly set,
 proj. 10 ins. above ground, with cap mkd.

T16SR13E
 N 1/16
 S8 S9
 LS4691
 1977

from which an old bearing tree;
 A pine, 14 ins. diam., bears S57 1/2°E, 115
 lks. dist., mkd. XBT.
 Continue S02°11'W
 (record 40.03) at which point
 40.00 Intersect the 1/4 section corner of sections 8
 and 9, previously described from which I started.
 Return to the S 1/16 corner of sections 9 and 10,
 previously described.

00.00 Thence
 S87°59'W, along the latitudinal centerline of the
 SE 1/4
 20.59 Point for SE 1/16 corner (center of SE 1/4) at
 which point
 Set an aluminum post, 30 ins long, 26 ins in
 ground, with cap mkd.

T16SR13E
 SE 1/16
 S9
 LS4691
 1984

from which;
 A pine 14 ins. diam., bears N58°W, 32 lks dist.,
 mkd XBT.
 Attach FS sign 54-3.
 A pine, 17 ins diam., bears S52°W, 32 lks dist.,
 mkd. XBT.
 Attach FS sign 54-3
 Drive a steel post with FS signs 54-2 and 54-9
 attached alongside monument.

00.00 Thence
 N00°28'W
 20.22 At which point
 Intersect the C-E 1/16 corner previously described.
 00.00 Thence
 N00°27'E
 40.51 At which point
 Intersect the E 1/16 corner of sections 4 and 9,
 previously described.

END OF SURVEY

STATE OF NEW MEXICO
 OTERO COUNTY
 FILED FOR RECORD IN MY OFFICE
 This day of Feb 1988
 at 4:10 o'clock P. M. and duly recorded
 Book No. 35 Page 22-24
 Records of Otero County, New Mexico
 County Clerk, Otero County, New Mexico
Ruben J. Lujan
 7795
 Bk 32 Pg 24
 SHEET 3 of 3

Michael E. Reeder
 12/28/84

U.S. Department of Agriculture
 FOREST SERVICE
 SOUTHWESTERN REGION, ALBUQUERQUE, NEW MEXICO
 RECORD OF SURVEY
 T16S, R13E, Sec. 9